



INSTALLATION VERSITILITY

The Senninger Triad can also be installed on Smooth Drive bases for a quick and economic conversion to Smooth Drive sprinklers once plants mature. (see pg. 9 for Smooth Drive base options)



The Triad is ideal for irrigating small root zones associated with small trees, oil palms, pecans and a variety of fruit trees.

FEATURES


- ▶ Three adjustable nozzles for greater control of direction and trajectory of streams
- ▶ Requires less filtration and a lower number of laterals compared to traditional micro-irrigation
- ▶ Solvent welds directly to PVC riser so there is no need to connect a fitting

SPRAYS

TRIAD DESIGN CRITERIA

	0° Trajectory Model	30° Trajectory Model
Flow Range*		
Minimum	0.94 gpm (213 L/hr)	0.94 gpm (213 L/hr)
Maximum	1.82 gpm (413 L/hr)	1.82 gpm (413 L/hr)
Pressure Range		
Minimum	10 psi (0.69 bar)	10 psi (0.69 bar)
Maximum	35 psi (2.41 bar)	35 psi (2.41 bar)
Radius @ 1.5 ft (0.46 m)		
Minimum	9.5 ft (2.9 m)	17.5 ft (5.3 m)
Maximum	17.5 ft (5.3 m)	34.5 ft (10.5 m)

*Flow rate is for all three nozzles combined. Tree diking is recommended for best water retention. The Triad uses one line of polyethylene tube every other row and one emitter for every three trees.

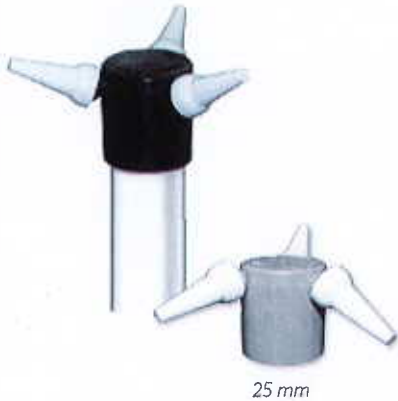

25 mm

TRIAD PRICING

MODEL NUMBER	DESCRIPTION	BOX QTY	BOX WT	LIST PRICE
Triad (US) complete	Triad (US) complete 3/4" F slip (black), adjustable 3-stream directional sprinkler	250	12#	\$3.76
Triad (MM) complete	Triad (MM) complete 25 mm F slip (grey), adjustable 3-stream directional sprinkler	250	12#	\$3.76
TRINZ040R	Triad Nozzle #4 (white)	9000	38#	\$0.80
TRI3S	Triad Base, 3/4" slip (black)	600	20#	\$1.36
TRI25MMS	Triad Base, 25 mm slip (grey)	600	20#	\$1.36

The Triad has three adjustable nozzles for greater control of direction and trajectory of streams.